

CONDUIT SIMPLE PAROI 0,5 mm



MARQUAGE C€ selon NF EN 1856-2

TUBAGE

T600 N1 D V2 L50050 G	Sans joint d'étanchéité
T200 P1 W V2 L50050 O	Avec joint d'étanchéité

UTILISATION:




SIMPLE PAROI
Inox et Alu

110 x 160	125 x 180	150 x 220	170 x 230	180 x 290	220 x 280
130	150	180	200	230	250

← Production sur commande, délai sur consultation →

132,00	153,00	164,00	169,00	180,00	189,62
92,00	95,00	105,00	125,00	130,00	146,00
70,00	78,00	88,00	96,00	99,00	110,00
130,27	150,00	185,00	210,00	220,00	240,00
130,27	150,00	185,00	210,00	220,00	240,00
109,00	119,00	129,00	139,00	149,00	159,00
125,35	136,85	148,35	159,85	171,35	214,65
26,44	26,44	38,40	42,60	46,90	46,90
65,12	65,12	74,60	79,10	85,60	92,40



PRIX HTVA

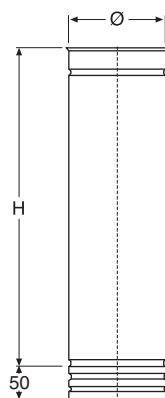


Longueur 1 m :
H = 950

Longueur 0,50 m :
H = 450


Longueur 0,25 m :
H = 200

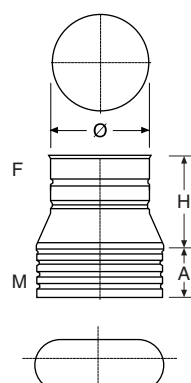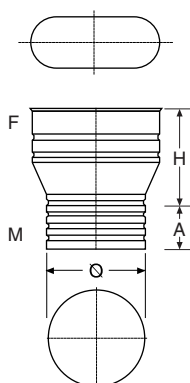

Ø	H	A
130	280	50
150	280	50
180	330	50
200	330	50
230	330	50
250	330	50

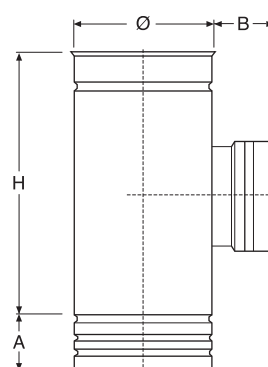

Ø	H	A	B
130	280	50	60
150	280	50	60
180	280	50	60
200	280	50	60
230	350	50	60
250	350	50	60



Ø	H
130	60
150	60
180	60
200	60
230	60
250	60

